



K.SPA X THE STRONGEST EXTENDABLE HEAVY-DUTY PLATFORM BY KÄSSBOHRER



Kässbohrer's extendable heavy-duty platform with 3 axles, K.SPA X, is the finest example of heavy-duty engineering. K.SPA X provides flexible and safe transportation solutions for heavy, long, flat and even ballast loads thanks to its extendable, strong and flat chassis, variable container positioning combinations and different load safety options such as Code XL certified front panel which is resistant up to 22,5 ton longitudinal loads.

Adaptable to standard trucks, K.SPA X enhances operational flexibility with its extendable chassis (up to 6.900 mm) and sliding platform features. Moreover, by the metallization coating technology, it provides the maximum durability against corrosion and rust perforation.



K.SPAX 3 / 1N - 18 / 27

SPECIFICATIONS

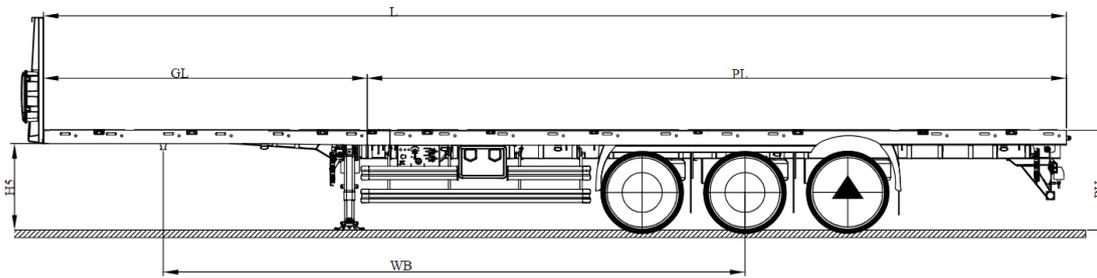

TECHNICAL INFORMATION

Chassis	Made of high quality and high strength S700 MC steel, in compliance with Standard ISO 1726
Brake System	Dual circuit electro-pneumatic Wabco brand EBS 4S/3M brake system with anti-blockage (ABS) and roll stability support (RSS) in compliance with Regulation UN ECE R13
Tyre Size	385/65 R 22.5 tyres size
Axles	BPW, air-suspension and disc brake axles
Electric System	24 Volt lighting installation with 2 x 7 + 1 x 15 pin socket in compliance with Regulation 76/756 /EEC
Floor	2 mm Omega profile reinforced 30 mm hardwood floor
Steering Type	2 units of fixed axles at the front, 1 unit of self-steering axle at the rear
Front Panel Type	Front panel manufactured from 1.500 mm high steel material with Code-XL Certificate

TECHNICAL DATA

External Length (L)	13.535 mm
Platform Extension Length (PE)	6.900 mm platform extension
Fifth Wheel Height (H5)	1.150 mm
Gooseneck (NH)	180 mm
Total Width (W)	2.540 mm

TECHNICAL CAPACITIES

Axle Load	27.000 kg
King Pin Capacity	18.000 kg technical king-pin capacity
Gross Vehicle Weight	Technical Total Weight [80 km/h] 45.000 kg

ENHANCED FEATURES

Product Range

For different customer needs, Kässbohrer platform product family includes extendable, non-extendable and heavy-duty platform semi-trailers adaptable to standard and mega trucks

Load Security Systems

Lashing rings

Gooseneck: 3 x 2 units of 13,4 ton capacity
Sliding Platform: 1 x 2 units of 8 ton capacity
Platform: 4 x 2 units of 8 ton capacity and 3 x 2 units of 13,4 ton capacity
Side Raves: 5 x 2 units of 8 ton capacity

Pillar pockets & pillars

10 x 2 units fixed pillar pockets on side raves (52 mm x 102 mm)
4 x 2 units latitudinal pillar pocket rows on platform (7 x 52 mm x 102 mm)
9 x 2 units pillars with EUMOS certification (50 mm x 100 mm x 1.200 mm)

Container locks

2 x 2 units for 20 ft, 30 ft, 40 ft and 45 ft containers
4 x 2 units for 2 x 20 ft containers

Wide Range of Options

Full or partial metallization

1st axle lifting
2nd king-pin + 3,5" pin
1 unit of fire extinguisher box (without fire extinguisher)
800 mm aluminum sideboards with lateral pillars
1.500 mm + 500 mm front panel (compatible with Code-XL)
1 unit rear flashing beacon light
Hubodometer

Kässbohrer semi-trailers are manufactured according to lean production and quality principles in consideration of total cost of ownership.

Kässbohrer reserves the right to alter the product specification. Visual and technical data subject to change according to vehicle configuration.

Kässbohrer Sales GmbH

Werk Ulm | Im Katzenwinkel 5, 88480 Achstetten, Deutschland | T +49 (0) 7392 96797-0 | F +49 (0) 7392 96797-67

Werk Goch | Siemensstraße 74, 47574 Deutschland | T +49 (0) 2823 9721-0 | F +49 (0) 2823 9721-21 | E info@kaessbohrer.com | www.kaessbohrer.com