



K.SWAU CL LIGHTEST CURTAINSIDER SWAP BODY BY KÄSSBOHRER

Kässbohrer's intermodal product range is complete with K.SWAU CL lightest curtainsider swap body in the market, engineered for the most economic and environmentally friendly intermodal transportation.

K.SWAU CL has up to C64 transportation code and 34 euro pallet capacity and provides maximum load capacity with its lightest tare weight 3.900 kg. With stowing and freight opportunity, K.SWAU CL will provide lower cost in operations.


Equipped with K-Fix Load Security System, K.SWAU CL provides 102 different strapping points, each with 2,5 ton capacity on a special side rave design. KTL coated K.SWAU CL chassis also partially metallized at the swap body and chassis touch points to prolong vehicle's lifetime.

K.SWAU CL offers Load Security Certificate EN 12642 Code XL - VDI 2700 for all the roof lifting positions.



K.SWAU.C+ / 45

SPECIFICATIONS

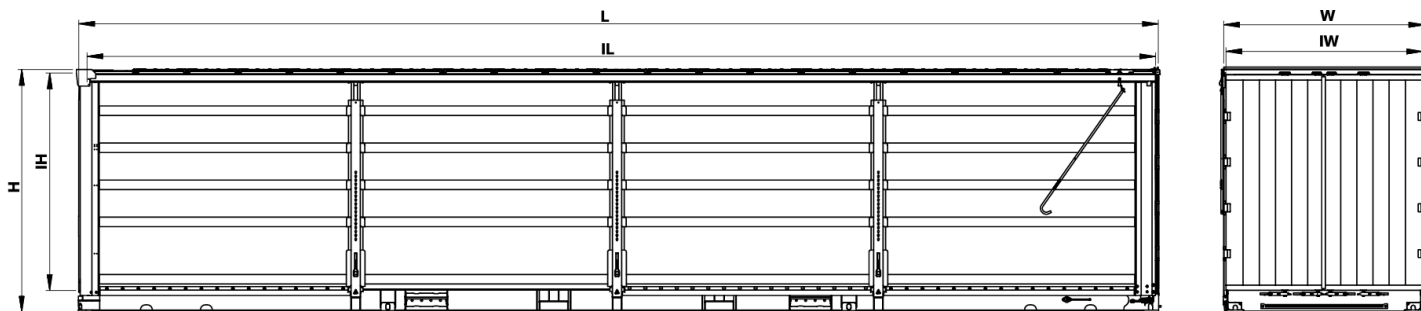

TECHNICAL INFORMATION

Chassis	Made of high strength S700 MC steel, 195 mm high sectioned longeron, reinforced chassis for intermodal transport with steel cross connection. Reinforced chassis provides train loading for intermodal transportation with different container lock positions which is suitable for 45 ft. and 40 ft. Equipped with 4 units of Crane connection points (2 left + 2 right). Tunnel dimensions : 4.000 x 1.030 x 120 mm
Floor	Phenol resin coated, 30 mm thick and water resistant plywood flooring that can support 7.200 kg forklift axle load in compliance with DIN EN 283
K-Fix	K-Fix has 49 holes per side rive which increases load lashing varieties. Each load strapping point has a load capacity of 2.5 tons
Front Panel Type	KTL coated steel panel and 2.440 mm plywood protection for protection
Roof Type	EDSCHA brand, one-way sliding roof system is included

TECHNICAL DATA

Internal Height (Ih)	2.850 mm
External Length (L)	13.715 mm
Internal Length (IL)	13.610 mm
Total Width (W)	2.550 mm
Internal Width (IW)	2.480 mm
Tare Weight ±%3	5.900 kg
Height code	C64

TECHNICAL CAPACITY

Gross Weight	34.000 kg
Pallet Capacity	34 units of Euro-pallets capacity

ENHANCED FEATURES

Load Security System

Multi-point lashing load securing system; coated with cathodic painting (KTL); 49 x 2 holes on side rail which increases load lashing

Roof & Roof Lifting System

Edscha one way sliding roof; 3 x 2 sliding lateral pillars

Transportation Code Options

290 mm neck heights with C45 transportation code
Inner height as 2.570 mm

Side Curtain Option

Side curtains with integrated vertical stainless steel planks

Wide Range of Options

Additional load lashing rings for 13 x 2 units with 2 ton capacity
Rear curtain tensioner
2 x 2 units map handling

Kässbohrer semi-trailers are manufactured according to lean production and quality principles in consideration of total cost of ownership.

Kässbohrer reserves the right to alter the product specification. Visual and technical data subject to change according to vehicle configuration.

Kässbohrer Sales GmbH

Werk Ulm | Im Katzenwinkel 5, 88480 Achstetten, Deutschland | T +49 (0) 7392 96797-0 | F +49 (0) 7392 96797-67

Werk Goch | Siemensstraße 74, 47574 Deutschland | T +49 (0) 2823 9721-0 | F +49 (0) 2823 9721-21 | E info@kaessbohrer.com | www.kaessbohrer.com