

## K.SWAU CL LIGHTEST CURTAINSIDER SWAP BODY

# **BY KÄSSBOHRER**

Kässbohrer's intermodal product range is complete with K.SWAU CL, the lightest curtainsider swap body in the market. Engineered for the maximum operational efficiency, K.SWAU CL is 24% lighter than universal swap bodies and has a tare weight equal to 3.900 kg. Light but robust, K.SWAU CL is the only light swap body offered with plywood floor with 7,2 ton forklift axle load capacity.


As Kässbohrer is the only trailer manufacturer having both KTL and Metallization facilities, K.SWAU CL's chassis is unique – coated with KTL, as well as with partial metallization on loading


points and full metallization on crane pockets. Upper structure designed according to C45 transportation code with modular aluminium front wall and swing doors, K.SWAU CL has 34 euro pallet capacity. In compliance with Standard EN 12642 Code XL - VDI 2700, Kässbohrer light curtainsider swap body is offered with in total 98 different multi-point lashing points, each with 2,5 ton capacity, and detachable  $16 \times 2$  lashing rings on side rave of the chassis.



## K.SWAU CL / 45

## **SPECIFICATIONS**

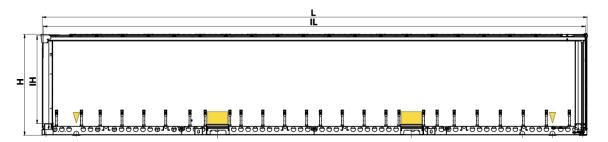



#### **TECHNICAL INFORMATION**

Chassis Made of high strength S700 MC steel, 290 mm high sectioned

longeron reinforced chassis for intermodal transport with steel cross con nection.

Weight-optimized construction designed for only load-spreading not

concentrated loads

Floor Phenol resin coated, 30 mm thick and water resistant plywood flooring that can

support 7.200 kg forklift axle load in compliance with DIN EN 283

K-Fix K-Fix has 49 holes per side rave which increases load lashing variaties. Each load

strapping point has a load capacity of 2.5 tons

Pallet Stopper 8 units of pallet stoppers

**Roof Type** Edscha brand, one-way sliding roof system is included **Front Panel Type** Aluminum front panel and 500 mm aluminium protection plate

**Rear Panel Type** Double doors with hidden lock, new generations aluminium profile door with  $\boldsymbol{2}$ 

#### TECHNICAL DATA

Internal Height (IH) 2.570 mm External Length (L) 13.715 mm Internal Length (IL) 13.610 mm Total Width (W) 2.550 mm Internal Width (IW) 2.480 mm Tare Weight ±%3 3.900 kg Height code C45

#### **TECHNICAL CAPACITY**

**Gross Weight** 34.000 kg

**Pallet Capacity** 34 units of Euro-pallets

capacity

#### **ENHANCED FEATURES**

#### **Load Security System**

Load Security Certificate according to EN 12642 Code XL - VDI 2700

### **Roof & Roof Lifting System**

Edscha one way sliding roof; 3 x 2 sliding lateral pillars

#### **Transportation Code**

290 mm neck heights with C45 transportation code Inner height as 2.570 mm

Side curtains have 24 units of integrated vertical stainless steel reinforcements on each sides

Kässbohrer semi-trailers are manufactured according to lean production and quality principles in consideration of total cost of ownership.

Kässbohrer semi-trailers are manufactured according to lean production and quality principles in consideration of total cost of ownership.