



K.SPH M HIGHEST MANEUVERABILITY HYDRAULIC STEERING DOUBLE EXTENDABLE LOW BED PLATFORM **BY KÄSSBOHRER**


Kässbohrer's double extendable, hydraulic steered low-bed platform with 4 axles, K.SPH M 4, is engineered to enable its customers to take the advantage of high maneuverability even on the narrowest curves in rural areas. With its extreme total length of 30 meters as well as the strong and flat chassis with a Mega coupling height, it provides flexible and safe transportation for heavy and ballast loads.

Despite its strong and robust chassis, it provides a maximum payload with its assertive tare weight of 13.950kg, among hydraulic steering low-bed platforms thanks to its air-suspension system that provides technical axle load of no less than 10 tons.



K.SPH M 4 - 2A / 4H - 18 / 48

SPECIFICATIONS

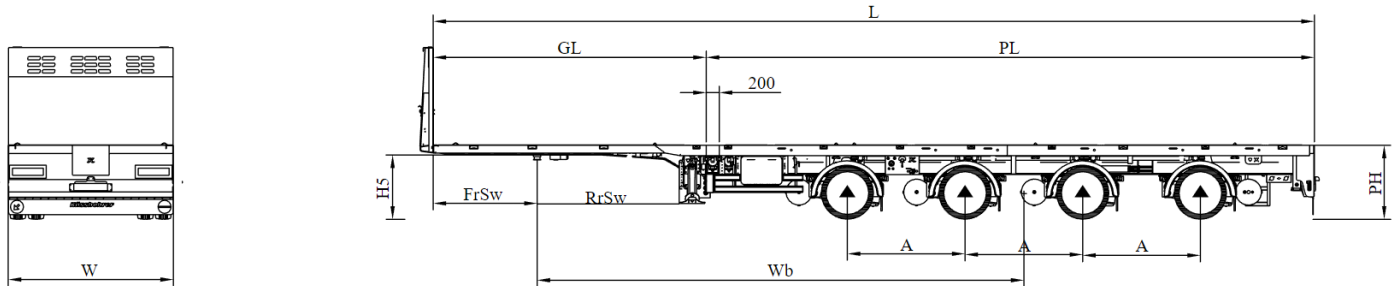

TECHNICAL INFORMATION

Axles	BPW drum brake axles
Electric System	24V electrical lightning system with 2 x 7 + 1 x 15 pin socket in accordance with Regulation UN ECE R48
Floor	2 mm omega arası ahşap
Steering Control	Cable and/or wireless remote control for external steering is included
Chassis	Made of high quality and high strength S700 MC steel, in accordance with Standard ISO 1726
Brake System	Abs 4S/2M
Tyre Size	245/70 R17,5 tyres
Front Panel Type	1.500 mm

TECHNICAL DATA

External Length (L)	13.550 mm
Platform Extension Length (Pe)	16000 mm (8100+7900)
Total Width (W)	2.550 mm. Total Width + 600 mm. Side Extensions
Gooseneck (NH)	120 mm
Fifth Wheel Height (H5)	950 mm
Platform Height (Ph)	1.100 mm

TECHNICAL CAPACITIES

King Pin Capacity	18 ton king-pin capacity
Axle Capacity	12 ton technical axle load capacity
Axle Load	48.000 kg

ENHANCED FEATURES

Product Range

For different customer needs, Kässbohrer platform product family includes extendable, non-extendable and heavy-duty platform semi-trailers adaptable to standard and mega trucks

Load Security System

Lashing rings

Gooseneck: 3 x 2 units of 10 ton capacity + 1 x 2 units of 5 ton capacity
Platform: 4 x 2 units of 8 ton capacity and 3 x 2 units of 13,4 ton capacity

Pillar pockets & pillars

14 x 2 units fixed pillar pockets on side rails (52 mm x 102 mm)
5 x 2 units latitudinal pillar pocket rows on platform (7 x 52 mm x 102 mm)

Container locks:

6 x 2 units for 20 ft, 2x20 ft, 40 ft and 45 ft containers

Wide Range of Options

Full or partial metallization
1st axle lifting
2" king-pin + 3,5" pin
Portable ramp apparatus and portable aluminum ramps with 32 ton capacity
1.500 mm + 500 mm front panel (compatible with Code XL)
4 units rear flashing beacon lights
Hubodometer

Kässbohrer semi-trailers are manufactured according to lean production and quality principles in consideration of total cost of ownership.

Kässbohrer reserves the right to alter the product specification. Visual and technical data subject to change according to vehicle configuration.

Kässbohrer Sales GmbH

Werk Ulm | Im Katzenwinkel 5, 88480 Achstetten, Deutschland | T +49 (0) 7392 96797-0 | F +49 (0) 7392 96797-67

Werk Goch | Siemensstraße 74, 47574 Deutschland | T +49 (0) 2823 9721-0 | F +49 (0) 2823 9721-21 | E info@kaessbohrer.com | www.kaessbohrer.com